

Characteristics

- **Standard Equipment:** refilling filter, electric minimum level and a pumping unit fixed or adjustable delivery.
- Standard version can be integrated with up to three pumping unit.
- **Two pumping units available:**
 $\varnothing 6 \text{ mm} = 10 \text{ cm}^3/\text{min}$ delivery;
 $\varnothing 8 \text{ mm} = 17 \text{ cm}^3/\text{min}$ delivery.
- **Proven pumping technology:** for 999 series pump elements.
- **Pressure:** 300 bar (4410 psi)
- **Fixed and adjustable:** pump elements

Advantages

- **Reduced Investment:** 989 pump series is ideal for application that require compact and low cost product.
- **999 pump elements:** all the pump units can be interchanged with 999 series.
- **Versatile:** combining three pump elements for higher output or manage up to three lubrication lines.

Applications

- Small-medium machine tools like CNC or press.
- Wide range of applications including: wood or glass working machine tools.

989 pump series

Compact and low cost; ideal for applications on small-medium size machine tools.



COMPACT AND LOW COST

989 pump series is ideal for applications where space and costs are key factors. The pump is perfectly integrated with the 999 pump series from which it inherits the main features like: modularity, quality and performance. For these reasons Series 989 represents the perfect solution for an extensive range of midsize applications.

STANDARD EQUIPMENT

The standard version is ready equipped to satisfy the requirements in small-medium machine tools applications. The standard version of the pump is complete with refilling filter, electric minimum level, a pumping unit with 6 mm or 8 mm diameter.

FIT YOUR APPLICATION NEEDS

989 pump series can fit the changing needs of your application. The availability of installing up to two pumping unit (with fixed or adjustable delivery) gives you two options: to triple the standard flow or connect three lubrication lines directly to the pump.

Fixed or adjustable delivery are available. The adjustable delivery is: 1,4 – 10 cm^3/min for 6mm diameter pump element and 2,5 – 17 cm^3/min for the 8mm diameter.

Contacts

www.dropsa.com
sales@dropsa.com

ITALY

Dropsa SpA
 t. +39 02-250791
 f. +39 02-25079767

U.K.

Dropsa (UK) Ltd
 t. +44 (0)1784-431177
 f. +44 (0)1784-438598

GERMANY

Dropsa GmbH
 t. +49 (0)211-394-011
 f. +49 (0)211-394-013

FRANCE

Dropsa Ame
 t. +33 (0)1-3993-0033
 f. +33 (0)1-3986-2636

CHINA

Dropsa Lubrication Systems
 (Shanghai) Co., Ltd
 t. +86 (021) 67740275
 f. +86 (021) 67740205

U.S.A.

Dropsa Corporation
 t. +1 586-566-1540
 f. +1 586-566-1541

AUSTRALIA

Dropsa Australia Ltd.
 t. +61 (0)2-9938-600644
 f. +61 (0)2-9938-6611

BRAZIL

Dropsa
 t. +55 (0)11-563-10007
 f. +55 (0)11-563-19408



Technical Information

TECHNICAL INFORMATIONS

Max. Working Pressure	300 Bar (4410 psi)
Max. Fixed delivery (pump unit Ø6 mm)	10 cm ³ / min (0.61 cu. in/min)
Max. Fixed delivery (pump unit Ø8 mm)	17 cm ³ / min (1.03 cu. in/min)
Adjustable Delivery (pump unit Ø6 mm)	1,4-10 cm ³ /min (0.085 – 0.61 cu. in. min)
Adjustable Delivery (pump unit Ø8 mm)	2,5-17 cm ³ /min (0.15 – 1.03 cu. in. min)
No. Of pump units	From 1 to 3
Reservoir	5 kg. (11 lb)
Lubricant	Grease
Viscosity at working temperature	NLGI 000, NLGI 2
Working temperature	+ 10° C ÷ + 40° C (+50° ÷ +104° F)
Motor voltage	220/380 V – 50/60 Hz
Absorption	90 W at 220/380 V – 100 W at 24V DC

DIMENSIONS

Pos.	mm (in.)
A	539,5 (21.24)
B	334 (13.15)
C	71 (2.79)
D	220 (8.66)
E	120 (4.72)

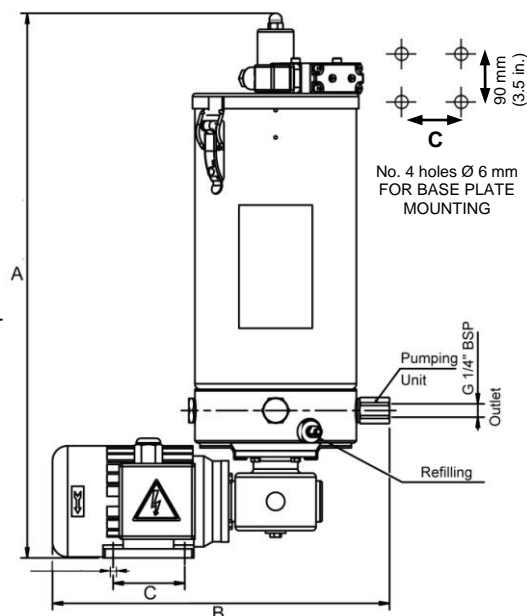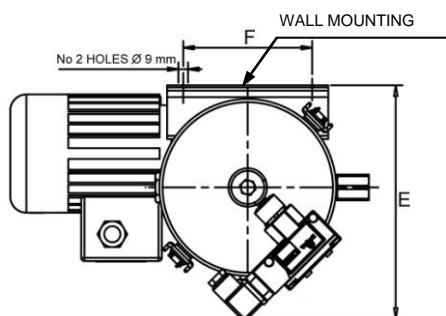

Ordering Information

FIXED DELIVERY VERSIONS

	Part No.	Description
220/380 V 50/60 Hz	989001	Grease Electro-pump 1 pumping unit Ø 6 mm
	989002	Grease Electro-pump 1 pumping unit Ø 8 mm
24 V DC*	989011	Grease Electro-pump 1 pumping unit Ø 6 mm
	989012	Grease Electro-pump 1 pumping unit Ø 8 mm

ADJUSTABLE DELIVERY VERSIONS

	Part No.	Description
220/380 V 50/60 Hz	989003	Grease Electro-pump 1 pumping unit Ø 6 mm
	989004	Grease Electro-pump 1 pumping unit Ø 8 mm
24 V DC*	989013	Grease Electro-pump 1 pumping unit Ø 6 mm
	989014	Grease Electro-pump 1 pumping unit Ø 8 mm

(*) For 24V version the motor is supplied with 1 mt (3.28 ft) without terminal

ACCESSORIES

Part No.	Description
299642C	Pump unit Ø 6 mm fixed delivery 10 cm ³ /min (0.61 cu. in/min)
299643C	Pump unit Ø 8 mm fixed delivery 17 cm ³ /min (1.03 cu. in/min)
299041C	Pump unit Ø 6 mm adjustable delivery 1,4-10 cm ³ /min (0.085 – 0.61 cu. in. min)
299042C	Pump unit Ø 8 mm adjustable delivery 2,5-17 cm ³ /min (0.15 – 1.03 cu. in. min)
888036	By Pass 0-250 Bar
3292099	Pressure gauge 0-400 Bar