

Contacts

www.dropsa.com
sales@dropsa.com

ITALY

Dropsa SpA
 t. +39 02-250791
 f. +39 02-25079767

U.K.

Dropsa (UK) Ltd
 t. +44 (0)1784-431177
 f. +44 (0)1784-438598

GERMANY

Dropsa GmbH
 t. +49 (0)211-394-011
 f. +49 (0)211-394-013

FRANCE

Dropsa Ame
 t. +33 (0)1-3993-0033
 f. +33 (0)1-3986-2636

CHINA

Dropsa Lubrication Systems
 (Shanghai) Co.,Ltd
 t. +86 (021) 67740275
 f. +86 (021) 67740205

U.S.A.

Dropsa Corporation
 t. +1 586-566-1540
 f. +1 586-566-1541

AUSTRALIA

Dropsa Australia Ltd.
 t. +61 (0)2-9938-600644
 f. +61 (0)2-9938-6611

BRAZIL


Dropsa do Brazil
 t. +55 (0)11-563-10007
 f. +55 (0)11-563-19408

Light Alloy Junctions


This junction are produced from extruded from light alloy sections and have two fixing holes. All holes are interconnected and threaded 5/16" – 24 NF with a 54° seating to suit compression cone **Part No. 93004** and bushing **Part No. 92009** (hex.8) or **92004** (hex.9). Suitable only for 4 mm (5/32") tubing.

Junction meter units type D21 and DDJ may be screwed directly in the junction. Junction of different length and fixing centres can be supplied to special order.


Part No. 30001
(3 way)




Part No. 42133
(3 way)




Part No. 42135
(3 way)




Part No. 42137
(3 way)




Part No. 40001
(4 way)




Part No. 42134
(2 way)




Part No. 42136
(4 way)



Part No. 42142
(5 way)

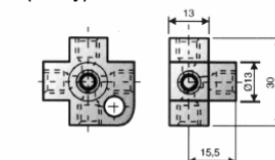


Part No. 42426 8 way double row junction

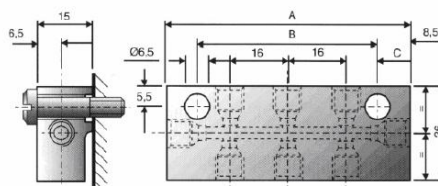

| OUTLETS | A (mm) | B (mm) | C (mm) | WEIGHT (Kg) | PART No |
|---------|--------|--------|--------|-------------|--------------|
| 6 | 50,3 | 33,3 | 8,65 | 0,038 | 42425 |
| 8 | 66,2 | 49,2 | 8,60 | 0,050 | 42426 |
| 10 | 82 | 65 | 8,50 | 0,062 | 42427 |
| 14 | 116 | 99 | 9,5 | 0,090 | 42428 |

Part No. 42126 5 way double row junction

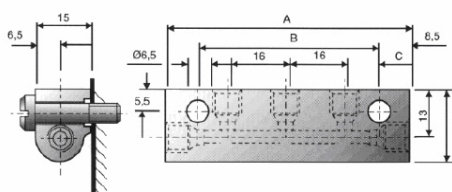

| OUTLETS | A (mm) | B (mm) | C (mm) | WEIGHT (Kg) | PART No |
|---------|--------|--------|--------|-------------|--------------|
| 4 | 50,3 | 33,3 | 8,65 | 0,038 | 42125 |
| 5 | 66,2 | 49,2 | 8,60 | 0,050 | 42126 |
| 6 | 82 | 65 | 8,50 | 0,062 | 42127 |
| 7 | 98 | 81 | 8,50 | 0,054 | 42128 |
| 8 | 113,8 | 96,8 | 8,40 | 0,064 | 42129 |
| 10 | 149 | 132 | 10 | 0,085 | 42130 |
| 12 | 177,2 | 160,2 | 8,10 | 0,098 | 42131 |